



POWER PUMP
LEADER IN CONCRETE PUMPING SERVICES


Pumping Unit Specification

Maximum Output	170 ³ m/h
Concrete Pressure	76 Bar
Stroke Per min	33
Delivery Cylinder	Ø230
Stroke Length	2100 mm
S-Valve	Ø200 x Ø180
Hydraulic System Pressure	350 Bar
Hydraulic Pump Model	A4VG125 x 2
Switching Type	Electrical
Max. Aggregate Size	40mm
Hopper Capacity	0,6 m ³ (600 Liters)
Water Pump Pressure	20 Bar
Water Tank Capacity	500 L

Specifications M42XK



Outrigger Diagram

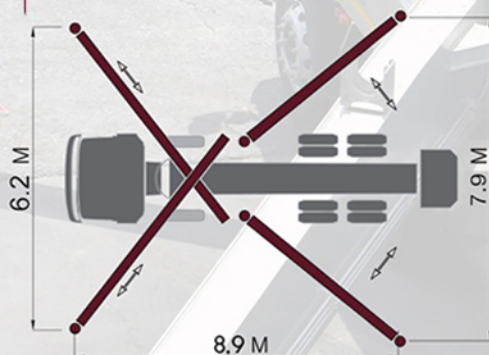

Unfolding Diagram



Boom Specification

Number of booms	5
Folding Type	RZ Folding
Vertical Reach	41.1 M
Horizontal Reach	36.1 M
Reach Depth	-28.1 M
Unfolding Height	7.94 M
Section Articulation	90°/180°/180°/262°/260°
Rotation	365°
Delivery Line	125 mm
End Hose Length	3.5 M
Proportional Boom Control	YES
Outrigger Spread-Front	6.2 M
Outrigger Spread-Rear	7.54 M